


SENTINEL

Your sentry for safe entry

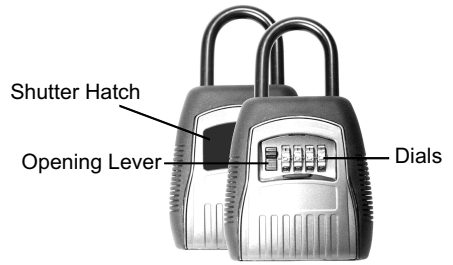

INSTRUCTIONS



Opening your Sentinel

1. Open shutter hatch to reveal the dial and the opening lever.
2. Dial existing combination, otherwise factory default 0.0.0.0
3. Press down on the opening lever.

Setting new combination for your Sentinel

Open the Sentinel door to reveal the setting mechanism (refer to the above)

2. Push the reset lever left and towards you and the reset lever will stay in position.
3. Rotate dials to your preferred combination.
4. Push the reset lever up and away from you to return to original position. Double-check your combination before closing the storage compartment door.
5. Close the storage compartment.
6. Scramble the combination dials to lock the Sentinel and conceal your combination.
7. Close the shutter hatch.

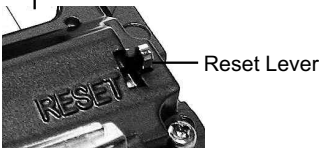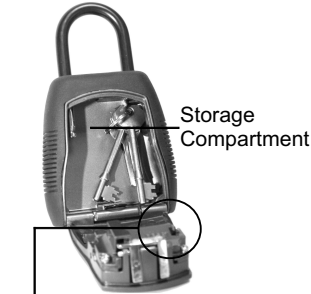

Opening your Sentinel shackle

1. Open your Sentinel (refer to above)
2. Release shackle slide release lever in direction of the arrow.
3. Open Sentinel shackle.
4. Then remove shackle.
5. Affix to suitable anchor.

Closing you Sentinel shackle

1. Holding the slide lever in the direction of the arrow.
2. Relocate shackle into Sentinel.
3. Then release slide lever.

NOTES:

1. We suggest that you mount your Sentinel in a discrete location away from direct view, such as porches, garage, out of direct eye line.
2. Keep shutter hatch closed to increase weather resistance and to conceal the dials from view. The release lever will open the Sentinel until you scramble the dials.

Release Lever



Support:

Tel: +44 (0)1527 592999 Fax: +44(0)1527 592666 www.sentinel-locks.com